


## DATA SHEET

# HYBRID ISOLATOR TAP PD

### DESCRIPTION

This high quality hybrid component includes in one product three different functions: Isolator, Tap and Photodiode. This allows to save space in design of amplifiers and components that need all these three functions.

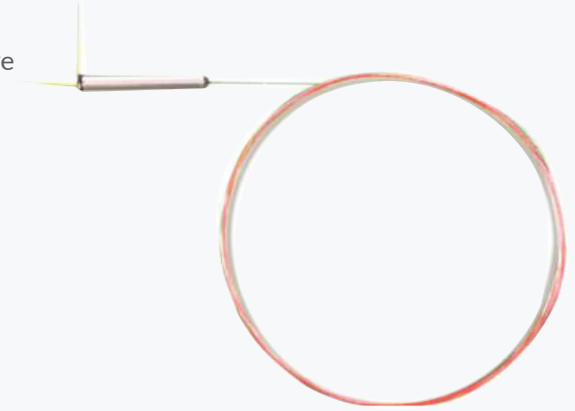

### KEY FEATURES

---

Highly integrated Isolator/TAP/PD

---

Super-compact size: Ø3.0x22

---

Customizable tap ratio, 1/2/5/X %

---

Provides high directivity for preventing backward optical power into PD

---

Low dark current

---

Operating temperature range: 0 °C to 70 °C

---

For additional information, visit [jabil.com/photonics](http://jabil.com/photonics)